

adore. europe



Inspiring Interiors For 50 Years



WOOD & STONE COLLECTION
DRYBACK & RIGID CLICK ACOUSTIC LVT



ADMIRAL SMOKE AD002



FINESSE CLICK

p.6



ADMIRAL CLICK

p.10



EMPRESS DRYBACK

p.14

YOUR FOUNDATION FOR STYLE AND DURABILITY

We offer high-quality flooring that gives any room a natural and stylish look. With options ranging from classic to modern designs, our floors suit any style. The wide pattern design avoids repetition, creating a smooth, unique look that adds character to your space.

Finesse features **EVA pad** and Admiral comes with **IXPE padding** for superior sound insulation, while Empress Dryback offers a durable **glue-down** solution with a sleek, professional finish.

Installation is quick and easy with a choice of **click or dryback methods**. Our floors are DIY-friendly and don't require special tools, making them great for renovations or new projects.

Made with strong materials, our floors have a durable **0.55 mm wear layer** that resists scratches, stains, impacts, and fading. They are built to handle daily use while staying beautiful over time. Cleaning is simple and doesn't require harsh chemicals, saving you time and effort.


With durability, style, and noise reduction, our flooring is a smart choice for any space.

STRUCTURE

UV Protector/ PU Coating :
Prevents discolouration and fading caused by UV rays, ensuring the flooring maintains its colour and appearance over time.

Design Layer : High-definition wood or stone designs with wide patterns.

SPC Core : Our floors have excellent stability, resilience, and a water resistant construction.

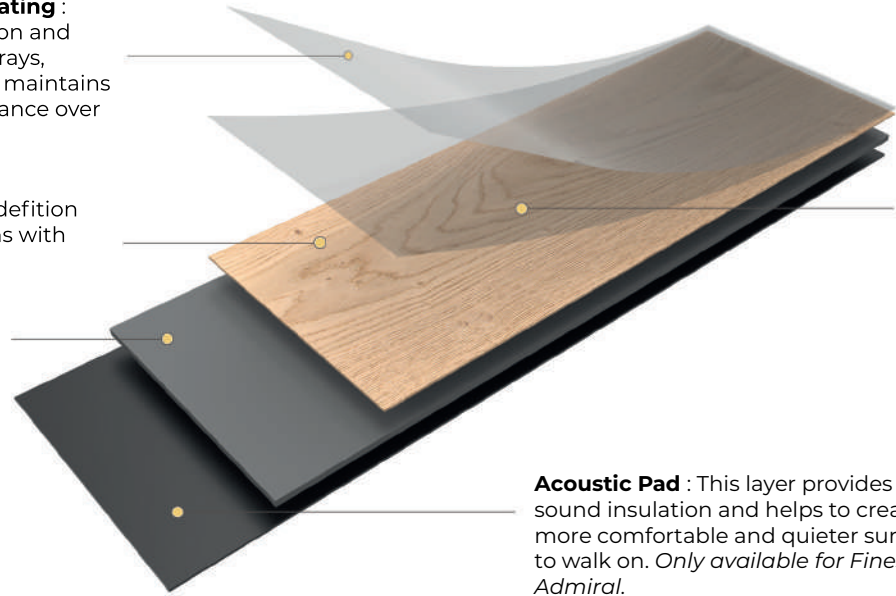

Protective Wear Layer :
This layer, with a wear layer of 0.55mm, serves as a defense against scratches, stains, and daily wear.

Acoustic Pad : This layer provides sound insulation and helps to create a more comfortable and quieter surface to walk on. *Only available for Finesse & Admiral.*



SOUND RESISTANT



ADVANCED STABILITY



MOULD & MILDEW RESISTANT



SCRATCH RESISTANT



PET FRIENDLY



WATER RESISTANT



EASY TO FIT



EASY-CARE



LIGHT & HEAT STABILITY



ANTI BACTERIAL



Finesse has a smooth, ultra matt finish and comes in natural colours. The wide planks make rooms look more open and luxurious. It comes with a DS/R10 slip rating, making it perfect for any application where style and safety matter. Finesse is easy to install thanks to the Unilin Click System, saving time and effort.



SPECIFICATIONS	STANDARD	FINESSE
Product Standard	ISO/DIS 19322.2:2016 EN 649	Heterogeneous resilient floor covering
Total Thickness	EN ISO 24346	5,0 mm
Acoustic Pad		1,0 mm EVA
Wear Layer Thickness	EN ISO 24340	0,4 mm
Classification	EN ISO 10874	Heavy Domestic : 23
Dimensions	EN ISO 24342	1220 x 228 mm 10 planks/box = 2,78 m² 40 boxes/pallet = 111,26m²
Installation System	-	Click Unilin
Bevelled Edges	-	Regular Bevel
Dimensional Stability	EN ISO 23999	≤ 0,15 %
Castor Chair	ISO 4918 EN 425:2002	Pass
Squareness & Straightness	EN ISO 24342	< 0,25mm
Residual Indentation	EN 433	< 0,1 mm
Acoustic Insulation	EN ISO 717-2	ΔLW = 20 dB
Colour Fastness	EN ISO 105-B02	Grade 6
Slip Resistance	EN 13893 DN 51130	DS R10
Resistance to Chemicals	ISO 26987	0 Not affected
Curl After Exposure to Heat	ISO 23999	< 1mm
Inflammability	EN 1350-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} -s1
Electrostatic Behaviour	EN 1815	Pass
REACH	EC N° 1907/2006	Pass
Staining Resistance	EN ISO 26987:2012	Class 0
Underfloor Heating Suitability	EN 12524	Suitable - max. 27°C
VOC Emission Class (French Reg- ulation) - Indoor Air Quality	ISO 16000-9	A+
FloorScore VOC Test - Indoor Air Quality	ISO 16000-9	Passed
Plasticizer	-	Phthalate free
Formaldehyde Emission	EN 14041:2004	Class E1
Recyclability	-	100%



DUARNO FIN4001



LA PAZ FIN4003




NORMAN FIN4004



KALMA FIN4005



PLANO FIN4006

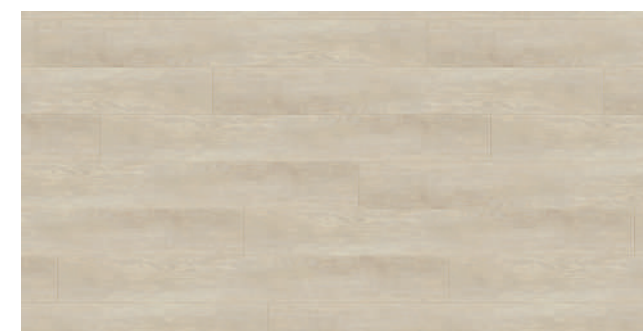

CASHMERE AR005



COPENHAGEN AR062



FINESSE CASHMERE AR005



FINESSE CASHMERE AR005




FINESSE COPENHAGEN AR062



With its 6,0 mm total thickness, Admiral offers a solid foundation for spaces that demand both durability and visual appeal. The 1,0 mm IXPE pad contributes to comfort and adds a layer of insulation against noise. Admiral has a matt finish that adds a touch of elegance to any environment, whether it's for a commercial space or a cosy residential area.



SPECIFICATIONS	STANDARD	ADMIRAL
Product Standard	ISO/DIS 19322.2:2016 EN 649	Heterogeneous resilient floor covering
Total Thickness	EN ISO 24346	6,0 mm
Acoustic Pad		1,0 mm IXPE
Wear Layer Thickness	EN ISO 24340	0,55 mm
Classification	EN ISO 10874	Commercial: 33
Dimensions	EN ISO 24342	760 x 380 mm 8 tiles/ box = 2,31 m ² 32 boxes/pallet = 73,93 m ²
Installation System	-	Click i4F
Bevelled Edges	-	Regular Bevel
Dimensional Stability	EN ISO 23999	≤ 0,15 %
Castor Chair	ISO 4918 EN 425:2002	Pass
Squareness & Straightness	EN ISO 24342	< 0.25mm
Residual Indentation	EN 433	< 0,1 mm
Acoustic Insulation	EN ISO 717-2	ΔLW = 22 dB
Colour Fastness	EN ISO 105-B02	Grade 6
Slip Resistance	EN 13893 DN 51130	DS R10
Resistance to Chemicals	ISO 26987	0 Not affected
Curl After Exposure to Heat	ISO 23999	<1mm
Inflammability	EN 1350-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} -s1
Electrostatic Behaviour	EN 1815	Pass
REACH	EC N° 1907/2006	Pass
Staining Resistance	EN ISO 26987:2012	Class 0
Underfloor Heating Suitability	EN 12524	Suitable - max. 27°C
VOC Emission Class (French Reg- ulation) - Indoor Air Quality	ISO 16000-9	A+
Floor Score VOC Test - Indoor Air Quality	ISO 16000-9	Passed
Plasticizer	-	Phthalate free
Formaldehyde Emission	EN 14041:2004	Class E1
Recyclability	-	100%

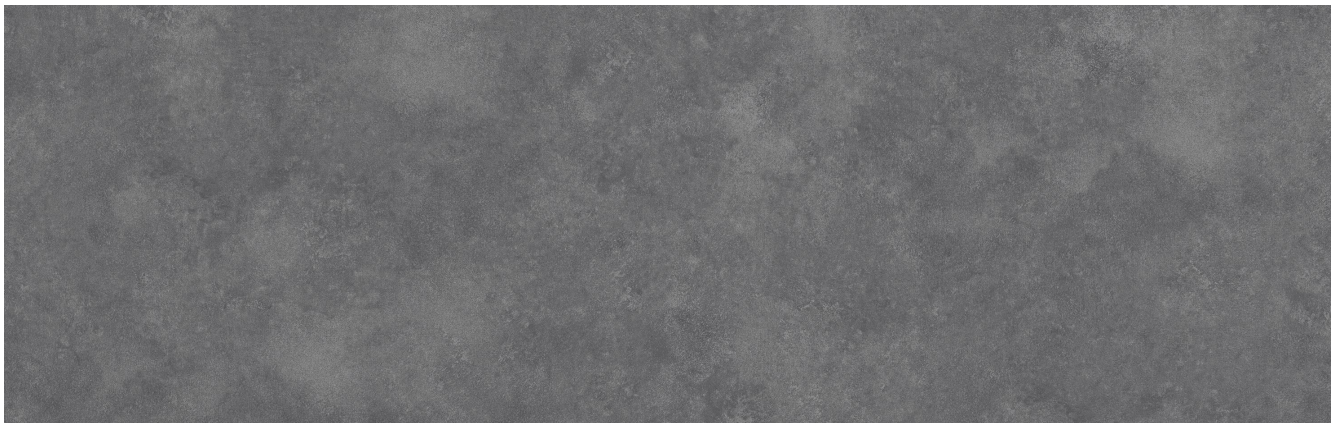

PEWTER AD001



SMOKE AD002



JASPER AD003



ASH AD004



ADMIRAL PEWTER AD001



ADMIRAL JASPER AD003



ADMIRAL ASH AD004



Empress is available in planks and tile designs. Made with a strong water resistant core and a 0,55 mm wear layer this range is resilient to the daily challenges of wear and tear. With the installation glue down, Empress is also a practical choice for spaces prone to moisture and heavy foot traffic.



SPECIFICATIONS	STANDARD	EMPRESS
Product Standard	ISO/DIS 19322.2:2016 EN 649	Heterogeneous resilient floor covering
Total Thickness	EN ISO 24346	2,5 mm
Acoustic Pad		N/A
Wear Layer Thickness	EN ISO 24340	0,55 mm
Classification	EN ISO 10874	Commercial: 33
Dimensions	EN ISO 24342	1219 x 184 mm (planks) 18 planks/box = 4,04 m ² 55 boxes/pallet = 222,20 m ² 609,6 x 302,8 mm (tiles) 18 tiles/box = 3,34 m ² 66 boxes/pallet = 220,44 m ²
Installation System	-	Glue Down
Bevelled Edges	-	Big Bevel
Dimensional Stability	EN ISO 23999	≤ 0,15 %
Castor Chair	ISO 4918 EN 425:2002	Pass
Squareness & Straightness	EN ISO 24342	< 0.25mm
Residual Indentation	EN 433	< 0,1 mm
Acoustic Insulation	EN ISO 717-2	N/A
Colour Fastness	EN ISO 105-B02	Grade 6
Slip Resistance	EN 13893 DN 51130	DS R10
Resistance to Chemicals	ISO 26987	0 Not affected
Curl After Exposure to Heat	ISO 23999	< 2mm
Inflammability	EN 1350-1 EN ISO 9239-1 EN ISO 11925-2	B _{f1} -s1
Electrostatic Behaviour	EN 1815	Pass
REACH	EC N° 1907/2006	Pass
Staining Resistance	EN ISO 26987:2012	Class 0
Underfloor Heating Suitability	EN 12524	Suitable - max. 27°C
VOC Emission Class (French Regulation) - Indoor Air Quality	ISO 16000-9	A+
Floor Score VOC Test - Indoor Air Quality	ISO 16000-9	Passed
Plasticizer	-	Phthalate free
Formaldehyde Emission	EN 14041:2004	Class E1
Recyclability	-	100%



HONEY AR25-1631




AUTUMN AR25-1603



RUSTIK AR25-1635



SLATE AR25-1671

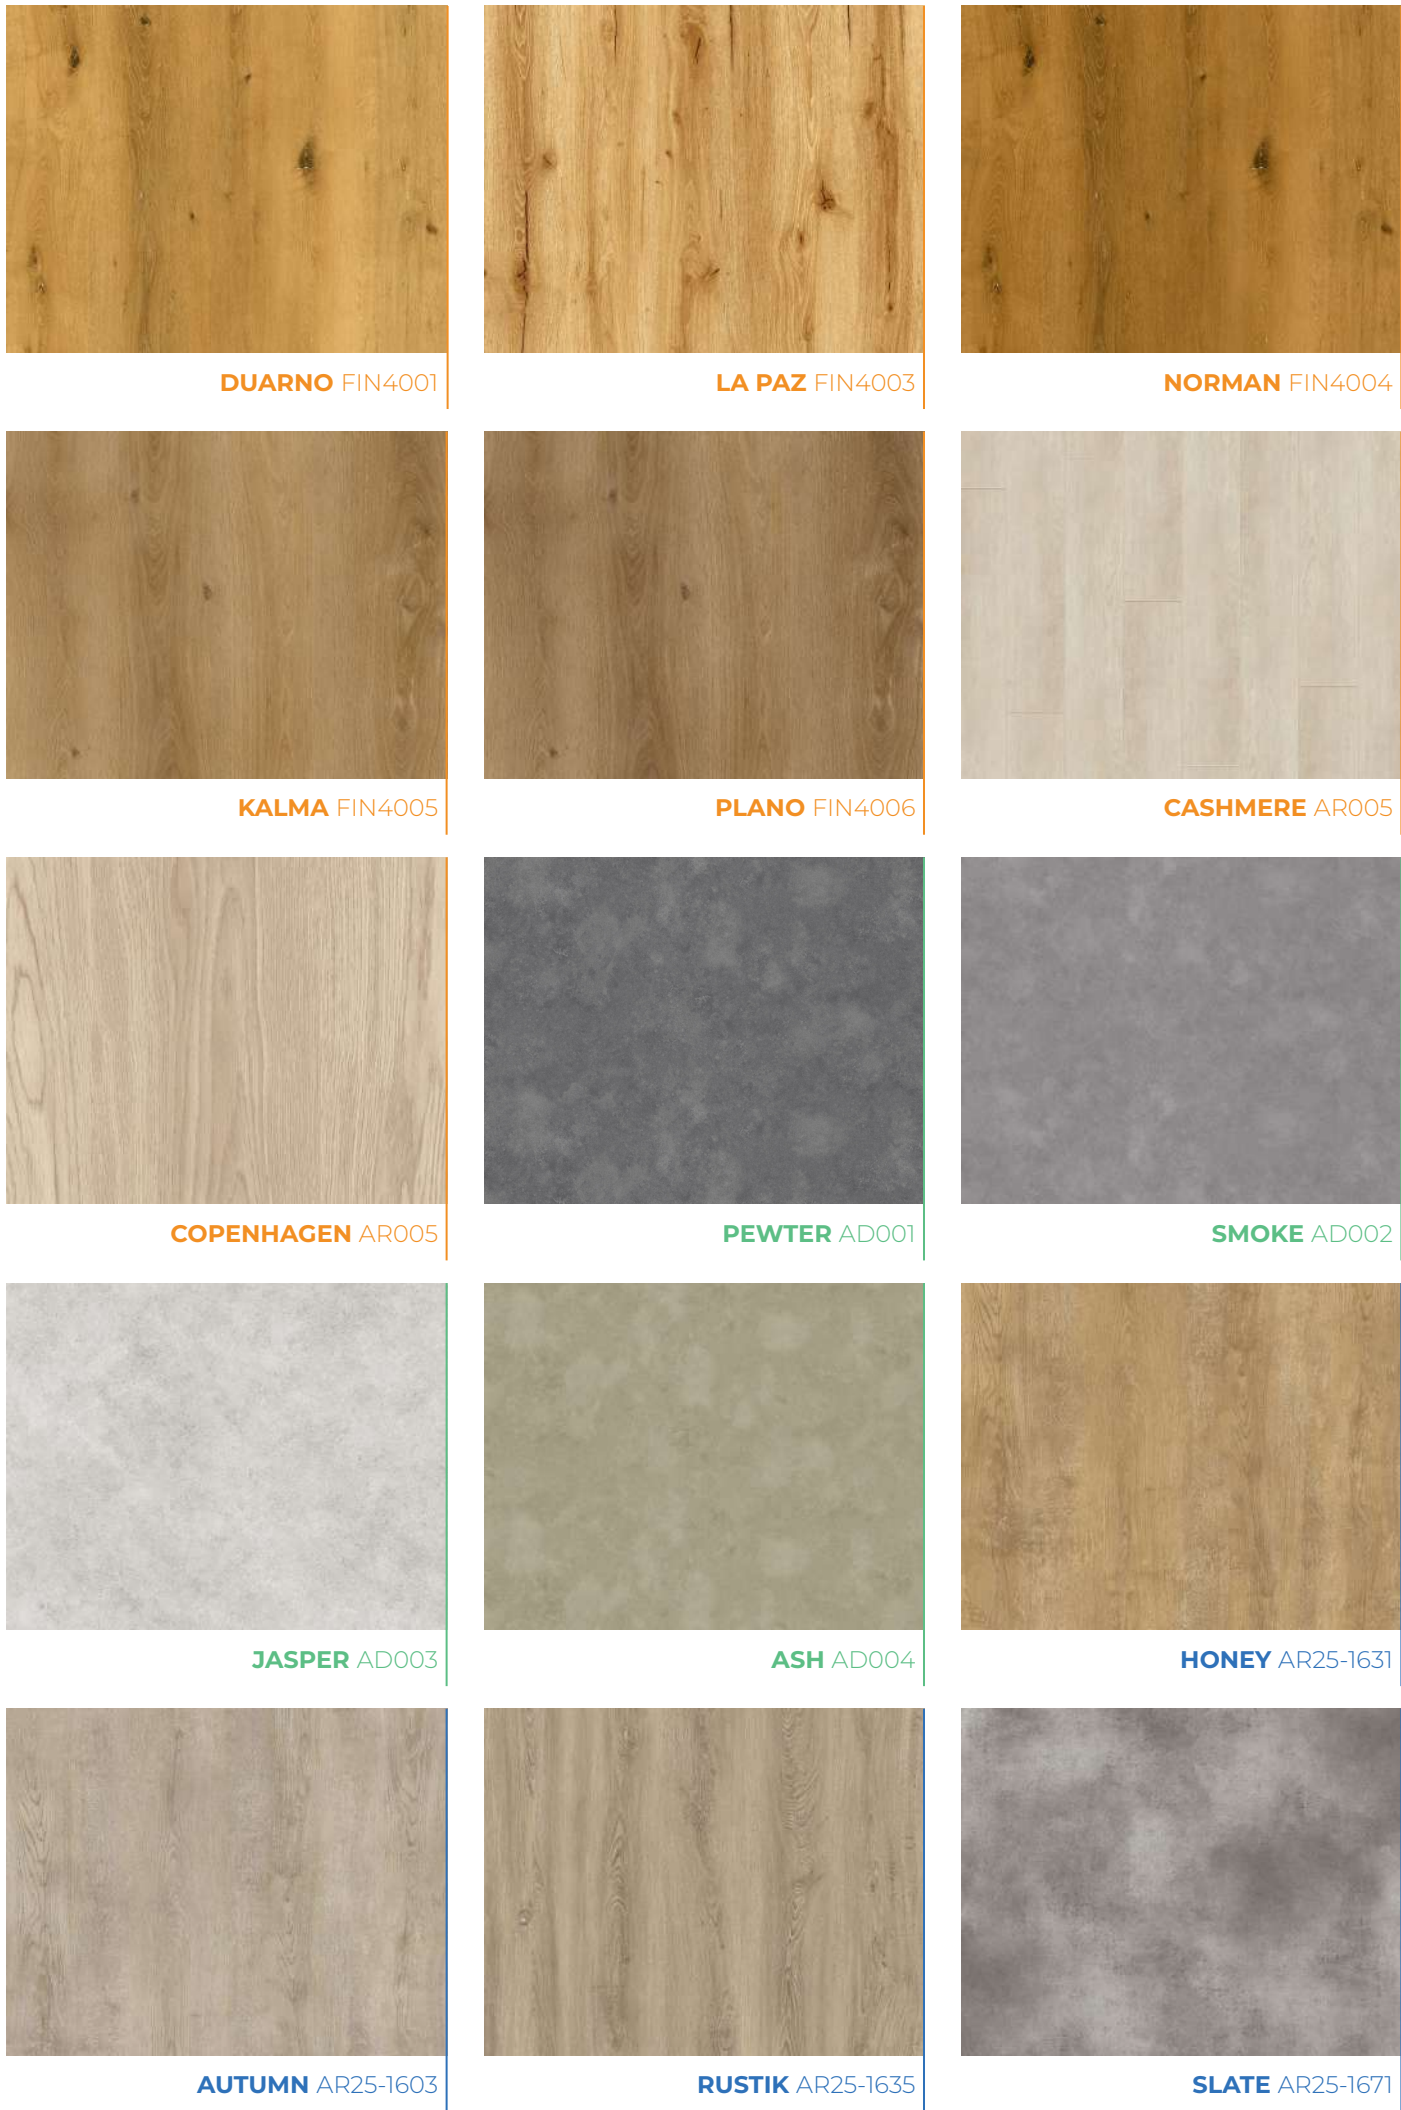

OUR COLLECTION AT A GLANCE



Thickness	5,0 mm	6,0 mm	2,5 mm
Wear Layer	0,55 mm	0,55 mm	0,55 mm
Acoustic Pad	1,0 mm EVA	1,0 mm IXPE	N/A
Installation	Unilin Click	i4F Click	Glue Down
Classification	Class 23	Class 33	Class 33
Packaging	2,78m² / 10 planks	2,31 m² / 8 tiles	4,04 m² / 18 planks 3,34 m² / 18 tiles

Regular Bevel
 Big Bevel
 Ultra Matt Finish
 Matt Finish



Inspiring Interiors For 50 Years

- 📍 Shop No. 5, Salah Al Din Road, Deira, Dubai, UAE
- ☎ +971 4 255 6252
- 📞 +971 52 987 3838
- 📱 @decorwallcovering